



BUILDING INTO FLAMMABLE MATERIAL WITH FIRE WALL

Building in the Scan 5004 FR/FL with radiation shields against a flammable wall protected by a fire wall.

-  Flammable material
-  Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities


All distances are in mm.

All distances are minimum distances

* Distance to glass


** Distance to flammable floor

*** Distance to furniture from glass

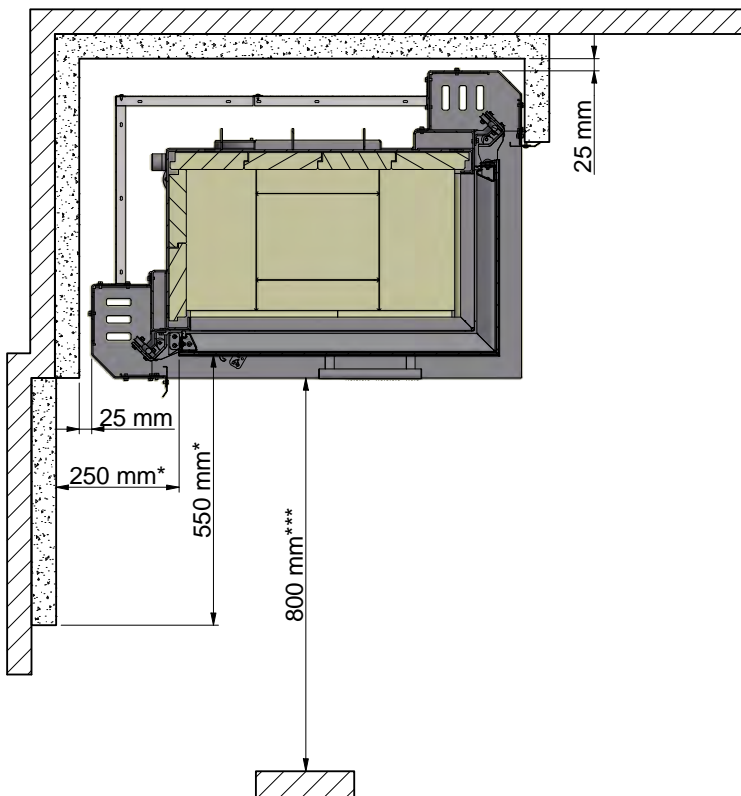

Installation with an insulated, vertical flue pipe

- structure/surround to ceiling

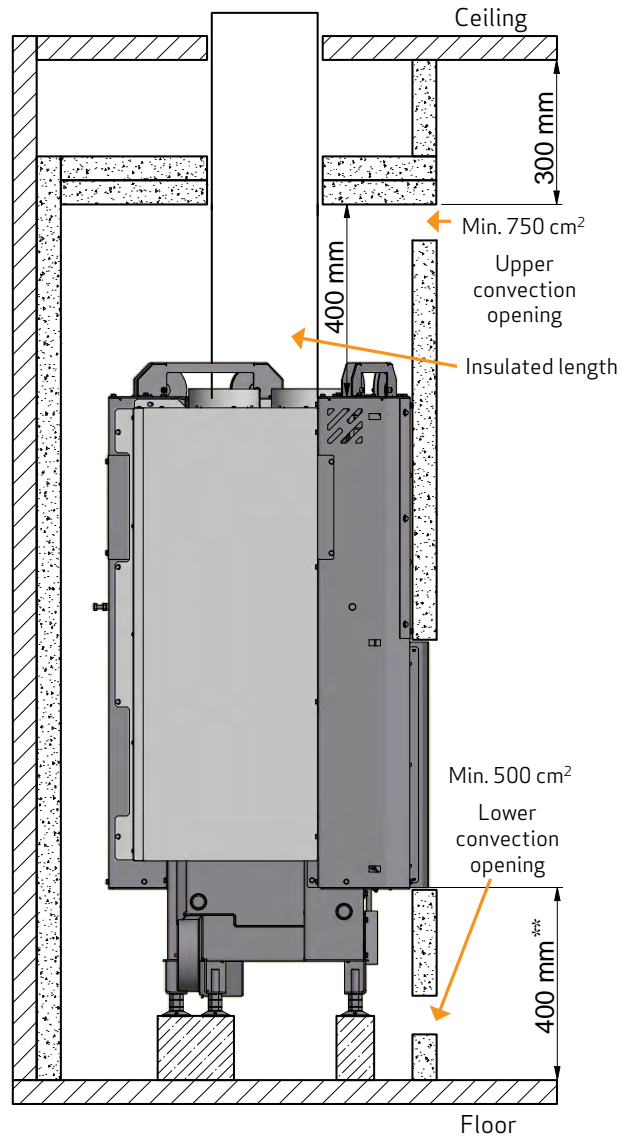

Installation with an insulated, vertical flue pipe

- open structure/surround

